



深圳市凯琦佳科技股份有限公司
SHENZHEN CECTN TECHNOLOGY CO., LTD

深圳市凯琦佳科技股份有限公司

铝电解电容器

PH20400122M4J7S0

400V1200μF

Φ 35 X 80

纳入规格书

客户名称:

物料编码:

受领印栏

注: 对此规格书确认后, 在确认后签名, 返传一份与敝公司



Snap-in Al-capacitors 铝电解电容器

PH20400122M4J7S0 400V 1200μF Φ 35 X 80 105°C 2000h

Features:

- 标准系列 Standard Series
- 小型化 Compact size
- 高可靠性 High reliability
- 符合ROHS要求 ROHS compatible
- 高纹波电流 High ripple current capability
- 105°C 负载寿命达到2000小时 Load life of 2000h at 105 °C

**Aluminum Electrolytic Capacitors Specification
Capacitors with Snap-in
焊片式铝电解电容器规格书**

Series/Type: PH20
Ordering code: PH20400122M4J7S0
Date: June 13, 2017
Version: 01

拟定created: 宋向华 审核checked : 李运强 批准 aproval:



1. 适用范围 Adapt Range

本产品规格书适用于深圳市凯琦佳科技股份有限公司电解电容器产品系列：

PH20

PH20

The product specification is adapted to series Aluminum :

SHENZHEN CECTN TECHNOLOGY CO.,LTD

2. 部品编号 Part Number System

PH20	400	122	M	4	J	7	S0
系列 Series	标称电压 Rated V (V) 400	额定容量 Rated C (μ F) 1200	容量组别 C Tolerance	焊针个数 Number of terminal 4个焊针	直径 D code 35	端子类型 Terminal style 短端子 (4.0±1)	在电性能方面有特殊要求 Some special requirements on electrical parameters

3. 电气特性 Electrical characteristics (表1)

额定电压 Rated WV (V. DC)	浪涌电压 Surge (V. DC)	额定容量 Rated C (μ F)	容量偏差 C Tol. (%)	损耗角 正切 TGD (MAX)	ESR典型值 Typical ESR ($m\Omega$)	漏电流 IL (mA , MAX, 5min)	额定纹波电流 Rated ripple current (A)	其它 others
400	450	1200	-20~+20	0.15	79.6	2.08	3.00	
at 120Hz 20°C							105°C 120Hz	

气候类别 Environmental Category : 40/105/56 (工作温度为-40°C至+105°C, 稳态湿热试验为56天)

4. 性能特性 Specification

No.	项目 Item	特性 Characteristics
1	外观检查 Visual examination marking (Non-Destructive)	外观: 无任何异常 Appearance: no remarkable abnormality
2	外形尺寸 Dimensions (Non-Destructive)	见外形图 See to dimensions
3	漏电流 Leakage current (Non-Destructive)	见表1 See to table 1
4	容量 Capacitance (Non-Destructive)	见表1 See to table 1
5	损耗角正切 Tangent of the loss angle (Non-Destructive)	见表1 See to table 1
6	端子强度 Robustness of terminations	拉力: 端子应能承受不小于20N的拉力后, 端子无可见损伤, 端子的铆接处不松动。 Tension: The terminal is required to withstand the tension of no less than 20N without noticeable damages and loose of rivet joint. 扭矩力: 端子应能承受不小于15N的扭矩力并在180°方向上受力两次, 端子无可见损伤, 端子的铆接处不松动。 Torsion: The terminal is required to endure the torsion of no less than 15N and can bear force twice at an angle of 180° without noticeable damages and loose of rivet joint.



7	振动 Vibration	频率范围Frequency range: 10—55Hz 振幅: 0.75mm Displacement Amplitude: 0.75mm 条件: X.Y.Z 方向各2小时 Direction and duration of vibration: 3 orthogonal directions mutually each for 2 hours Total 6 hours 静电容量测试时无接触不良，断线及短路，端子无机械损伤 Capacitance: During the test, measured value to be stabilized (when measured several times within 30 min before completion of test) Appearance: No remarkable abnormality 静电容量变化: 初始值的-15～+15%以内 Capacitance change: Within -15～+15% of the initial value				
8	稳态湿热 Dump heat	温度: 40±2°C 湿度: 90-95%Rh 时间: 56天 Test Temperature :40±2°C Relative Hwmidity:90-95%Rh Test time: 56天 试验后常温放置1-2小时 To expose in the atmospheric condition for 1 to 2 hours after completion of test 漏电流: 不超过规定值 Leakage current: Not more than the specified value 静电容量变化: 初始值的-20～+20%以内 Capacitance change: Within -20～+20%of the initial value 损耗角正切: 不超过规定值 Dissipation Factor: Not more than the specified value 绝缘电阻 (使用金属箔法) : 大于100MΩ Insulation Resistance (Using metal foil) : ≥100MΩ				
9	耐久性 Endurance	<table border="1"><tr><td>时间 (Time)</td><td>2000h</td><td>温度temperature</td><td>105°C</td></tr></table> 电压: 额定电压 (叠加规定纹波电流) 试验后常温放置16h测定 Applied Voltage:maximum value of DC voltage overlapped by an allowable ripple current. The capacitors shall then be removed from the test chamber and stabilized at room temperature for 16 hrs. after. 漏电流: 不超过规定值 Leakage Current:Not more than the specified value 电容量变化: 初始值的-20～+20%以内 Capacitance change:within-20～+20% of the initial value 损耗角正切: 不超过规定值的2.0倍 Dissipation Factor:Not more than 200% of the specified value	时间 (Time)	2000h	温度temperature	105°C
时间 (Time)	2000h	温度temperature	105°C			
10	浪涌 Surge	<table border="1"><tr><td>印加电压 (VDC)</td><td>450</td><td>温度temperature</td><td>15～30°C</td></tr></table> 周期: 6±0.5min 30±5sec充电 A period:6±0.5min(charging for 30±5sec) 充电电阻: 1000Ω 回数: 1000 times Series protective resistance The number of times 漏电流: 不超过规定值 Leakage Current:Not more than the specified value 电容量变化: 初始值的15%以内 Capacitance change:within 15% of the initial value 损耗角正切: 不超过规定值的1.75倍 Dissipation Factor:Not more than 175% of the specified value	印加电压 (VDC)	450	温度temperature	15～30°C
印加电压 (VDC)	450	温度temperature	15～30°C			




11	压力释放 Pressure relief	电容器上印加10A 逆向直流电，防爆阀正常动作，无金属片飞散，起火，爆炸。 The capacitor is shall be connected in inverse polarity, and applied DC current at 10A constant, The pressure relief device shall open in such a way as to avoid any danger of fire or explosion of capacitor elements																				
12	高温贮存 Storage at upper category temperature	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">温度 (temperature)</td> <td style="padding: 2px;">105°C</td> </tr> <tr> <td colspan="2" style="padding: 2px;">时间(Time): 1000h</td> </tr> <tr> <td colspan="2" style="padding: 2px;">电压处理: 常温下电容器串联保护电阻(1K), 加额定电压30分钟, 印加后放电, 常温放置24-48小时</td> </tr> <tr> <td colspan="2" style="padding: 2px;">Condition: Following this period the capacitors shall be removed from the test chamber and be allowed to stabilize at room temperature. Next they shall be connected to a series limiting resistor (1K), with DC. Rated Voltage applied for 30 min, after which the capacitors shall be discharged. The capacitor shall be stored under room temperature for 24 -48 hours.</td> </tr> <tr> <td colspan="2" style="padding: 2px;">漏电流: 不超过规定值</td> </tr> <tr> <td colspan="2" style="padding: 2px;">Leakage Current: Not more than the specified value</td> </tr> <tr> <td colspan="2" style="padding: 2px;">电容量变化: 初始值的20%以内</td> </tr> <tr> <td colspan="2" style="padding: 2px;">Capacitance change: within 20% of the initial value</td> </tr> <tr> <td colspan="2" style="padding: 2px;">损耗角正切: 不超过规定值的2倍</td> </tr> <tr> <td colspan="2" style="padding: 2px;">Dissipation Factor: Not more than 200% of the specified value</td> </tr> </table>	温度 (temperature)	105°C	时间(Time): 1000h		电压处理: 常温下电容器串联保护电阻(1K), 加额定电压30分钟, 印加后放电, 常温放置24-48小时		Condition: Following this period the capacitors shall be removed from the test chamber and be allowed to stabilize at room temperature. Next they shall be connected to a series limiting resistor (1K), with DC. Rated Voltage applied for 30 min, after which the capacitors shall be discharged. The capacitor shall be stored under room temperature for 24 -48 hours.		漏电流: 不超过规定值		Leakage Current: Not more than the specified value		电容量变化: 初始值的20%以内		Capacitance change: within 20% of the initial value		损耗角正切: 不超过规定值的2倍		Dissipation Factor: Not more than 200% of the specified value	
温度 (temperature)	105°C																					
时间(Time): 1000h																						
电压处理: 常温下电容器串联保护电阻(1K), 加额定电压30分钟, 印加后放电, 常温放置24-48小时																						
Condition: Following this period the capacitors shall be removed from the test chamber and be allowed to stabilize at room temperature. Next they shall be connected to a series limiting resistor (1K), with DC. Rated Voltage applied for 30 min, after which the capacitors shall be discharged. The capacitor shall be stored under room temperature for 24 -48 hours.																						
漏电流: 不超过规定值																						
Leakage Current: Not more than the specified value																						
电容量变化: 初始值的20%以内																						
Capacitance change: within 20% of the initial value																						
损耗角正切: 不超过规定值的2倍																						
Dissipation Factor: Not more than 200% of the specified value																						
13	绝缘耐压 insulation withstanding voltage	2000VAC施加于短路的端子和固定卡箍之间, 1分钟不破坏 A voltage of 2000VAC is applied for one minute between the terminals shorted each other and the mounting clamp on insulating sleeve covering the case, there shall not be damaged																				

5. 标识Marking

1
 |
 C E C T N
 PH20M4J7S0 ————— 2
 1200μF 400V- ————— 3
 CE 105°C ————— 4
 |
 5

No.	项目 Item	No.	项目 Item
1	商标 Brand	4	额定电压 Rated voltage
2	产品系列编码 Products number	5	温度类别 Climate category
3	静电容量 Capacitance		

6. 外型图|Dimensions

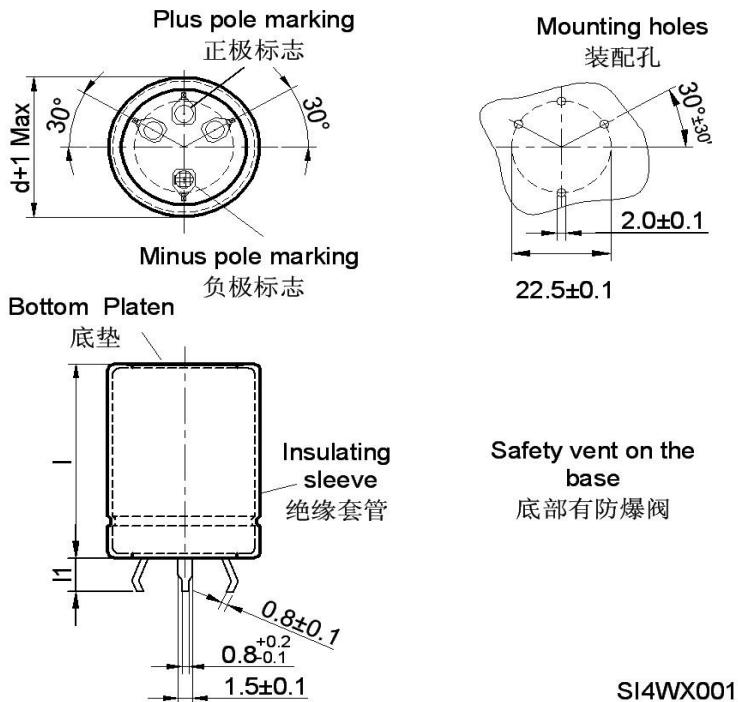


d: 35±1mm

l: 80±2mm

l₁: 4.5±1mm


7. 构造图|Frame drawing

7-1 构造图(Frame drawing)

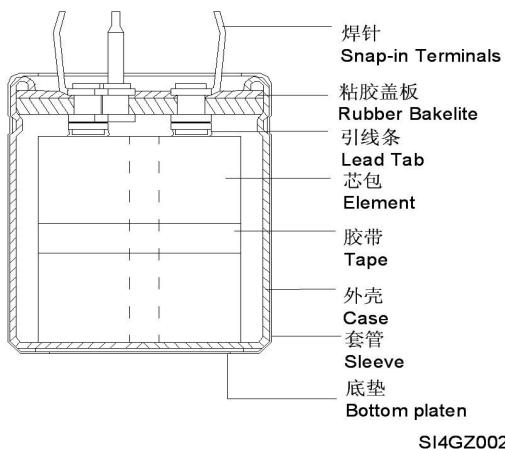



7-2工艺芯包分解图 (Element drawing)

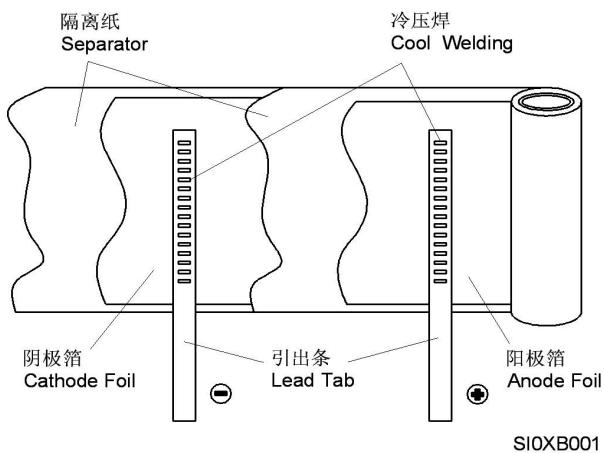



8. 纹波电流系数 Multiplier for ripple current

8-1 频率系数 Frequency Coefficient

频率 (Hz) Freq.	V _R	50	120	300	1K	≥10K
系数 Coe.	160~250	0.75	1.00	1.17	1.32	1.45
系数 Coe.	350~500	0.70	1.00	1.13	1.30	1.41

8-2 温度系数 Temperature Coefficient

温度(℃) Tem.	+40	+55	+70	+85	+105
系数 Coe.	2.7	2.5	2.1	1.7	1.0

9. 包装Packaging

9-1 包装数量 Packaging Quantity

电容器尺寸	装箱数量
Capacitor Size	Qty per carton
Φ 35X80	150 PCS

9-2 包装箱材质 Material of Packaging Carton

瓦楞纸

Corrugated Cardboard

9-3 包装箱尺寸 Dimensions of Packaging Carton

外箱尺寸 Carton Dimensions :	400mm X 300mm X 209mm
--------------------------	-----------------------

10. 生产日期的表示方法 Production date code

YY.MM.

例 EX: 11 08

2011年8月份

Production date: produced in August.2011